DESIGN HEATER



 Aesthetic heating device:
adaptation to the architecture of the building

✓ Ignition and thermoelectric flame control

 Recyclable materials: stainless steel burner and ceramic plates, aluminum body

✓ Comfort and efficiency range

✓ Available colors: black, aluminum, bronze and champagne












DESIGN HEATER

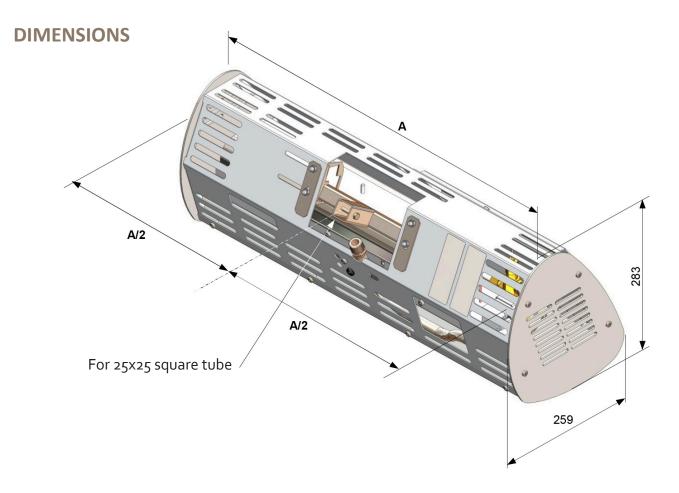

TECHNICAL DATA

MODEL	XD 8	XD 10	XD 12	XD 16
Nominal power (kW)	3.7	4-3	5.7	7.6
GAS				
Gas consumpt. in G20-20mbar (m³/h)	0.35	0.40	0.54	0.72
Gas consumpt. in G25-25mbar (m ³ /h)	0.40	0.47	0.63	0.83
Gas consumpt. in G31-37mbar (kg/h)	0.26	0.30	0.40	0.53
Gas input connection	Fitting G1/2» cylindrical (ISO 228-1)			
ELECTRICITY				
Power supply	230V (+10% - 15%) — 50Hz Neutral mandatory			
Consumption* (VA)	28			
DIMENSIONS				
Weight (kg)	5.25	5.75	6.5	7.75
A (mm)	576	625	702	826

* Consumption during 45 seconds of ignition

Certificate number $\mathbf{C} \in \mathbf{C}$: 1312 CQ 6090 (home appliances included) NOx class : 5 (<50 mg/kWh)

