

# LUMINOUS HEATER (low-height)


**XLA-I**



- ✓ Wide and uniform heat, suitable for low-rise buildings
- ✓ Exceptional heating comfort
- ✓ Simplified installation (no drilling of the building envelope)
- ✓ Stainless steel body and burners
- ✓ Flame control by ionisation



## OPERATION


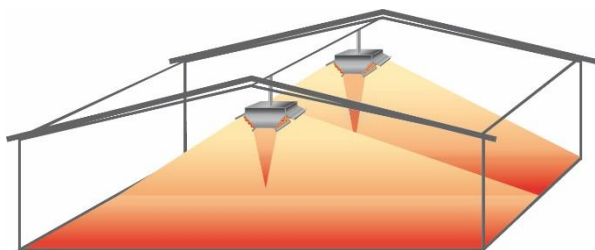


Infrared heating solution brings **comfort** directly to the end users, thus generating **energy savings**.

Efficient for **all types of buildings** up to **5m** high.

## DIMENSIONS

212 and 216 XLA-I

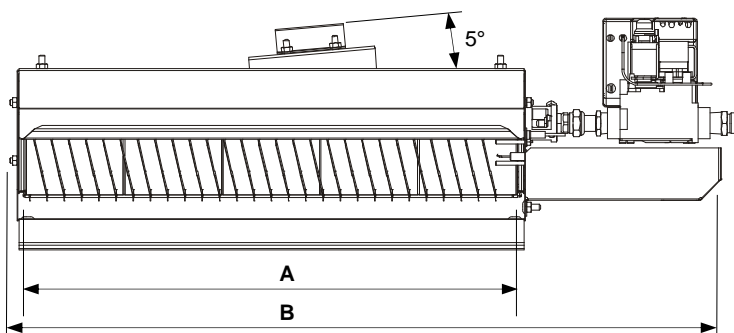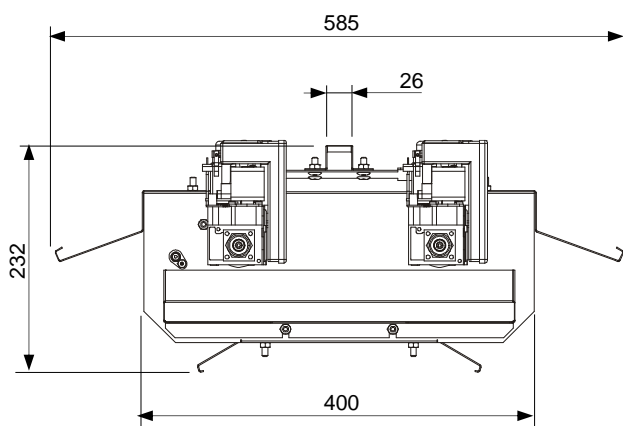

## TECHNICAL DATA

MODEL	212 XLA-I	216 XLA-I
<b>Nominal power (kW)</b>	<b>11.3</b>	<b>15.0</b>
<b>GAS</b>		
<b>Number of burners</b>	<b>2 (inclined to 45°)</b>	<b>2 (inclined to 45°)</b>
Gas consumpt. in <b>G20-20mbar</b> (m³/h)	1.08	1.43
Gas consumpt. in <b>G25-25mbar</b> (m³/h)	1.26	1.66
Gas consumpt. in <b>G31-37mbar</b> (kg/h)	0.80	1.06
Gas input connection	Fitting G1/2" cylindrical (ISO 228-1)	
<b>Double speed option</b>	✓	✓
<b>ELECTRICITY</b>		
Power supply	230V (+10% - 15%) – 50Hz Neutral mandatory	
Consumption (VA)	38	38
<b>DIMENSIONS</b>		
Weight (kg)	8.5	9.6
A (mm)	380	505
B (mm)	606	730

Certificate number **CE** : 0461 CM 0994  
**NOx class : 5 (<50 mg/kWh)**