










20ZRFS

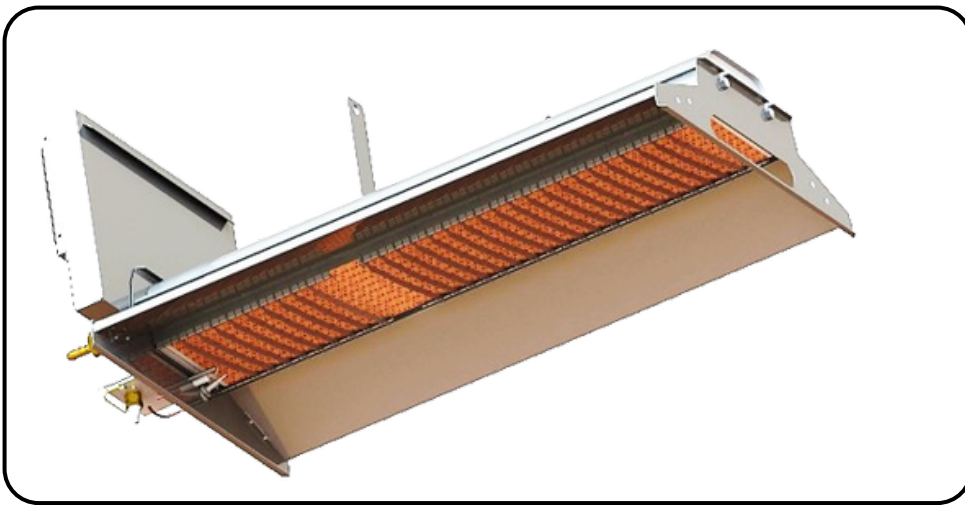


- ✓ The new 20ZRFS rearing unit replaces three small, conventional 8ZRFS rearing units
- ✓ Reduces wear parts and maintenance by a factor of 3
- ✓ Compatible with butane, propane, or natural gas injectors
- ✓ Upgradable : comes with a cylinder and regulator, and can be upgraded to piezoelectric/automatic ignition for integration into modern HVAC systems
- ✓ Robust and highly efficient design, offering extended service life
- ✓ Equipped with a non-flammable metal filter, which reduces maintenance and the costs associated with regularly replacing foam filters
- ✓ Covers an area of 50 to 80 m² (depending on insulation and climate) and up to 9 m wide
- ✓ Atmospheric burner technology for optimal combustion and gas savings
- ✓ Ideal for small family farms, certified or organic operations, as well as industrial chicken and turkey facilities

Dimensions

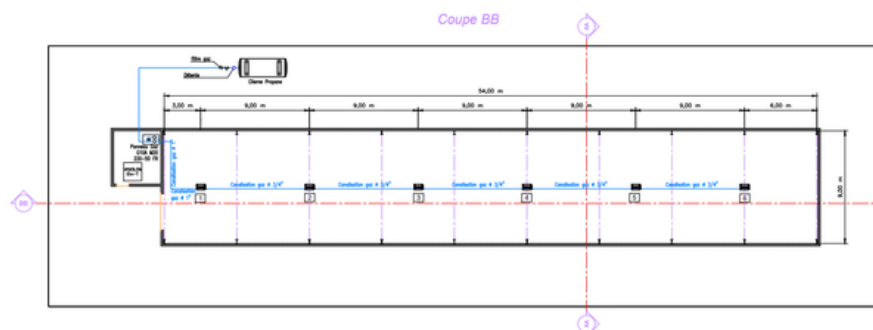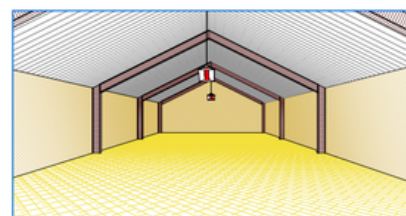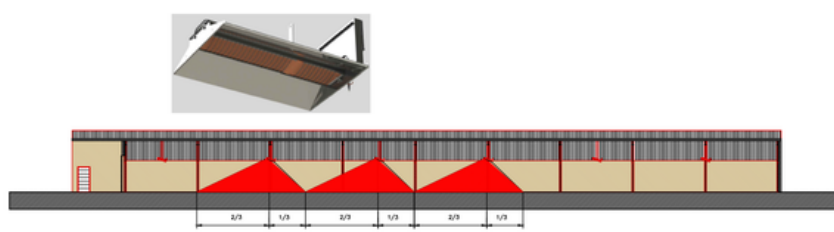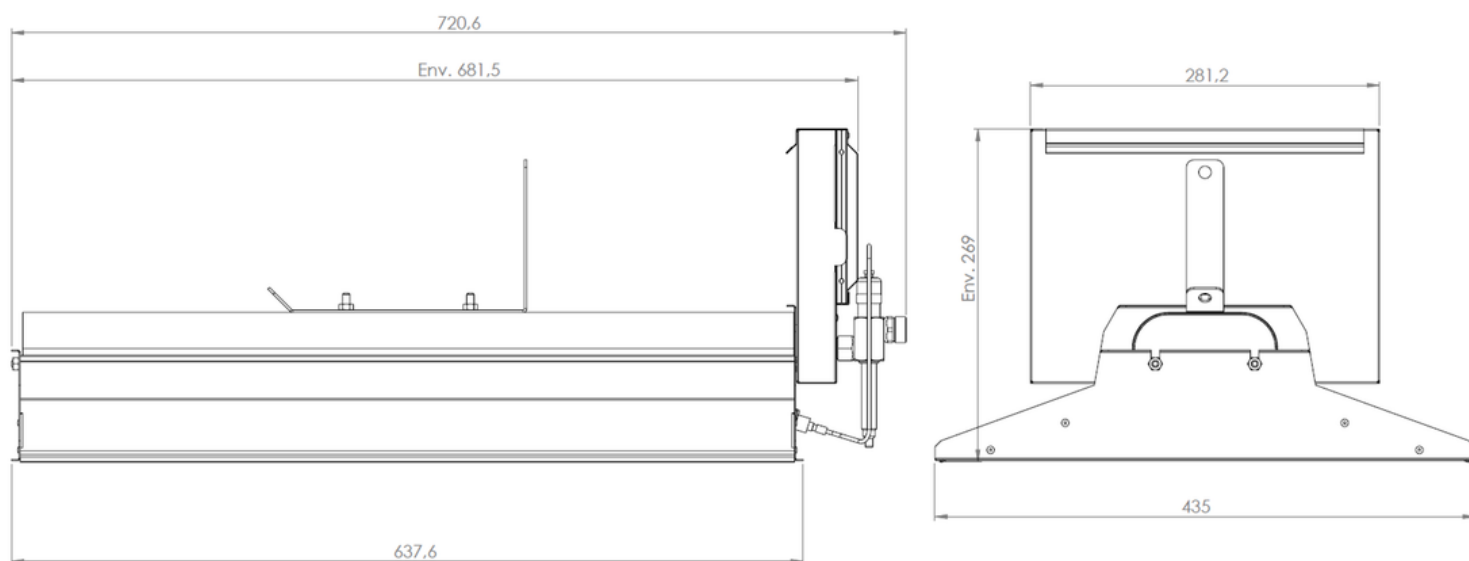


Technical Specifications

20ZRFS radiant SBM



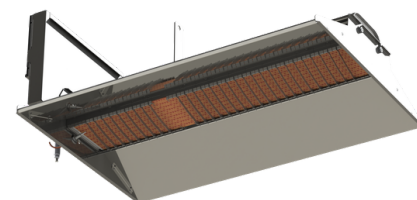


20ZRFS	Nominal inlet pressure : 148 mbar Minimum-Maximum : -60 to 180 mbar (butane, propane) 90-180 mbar natural gas		
	G30 Butane	G31 Propane	G20 Natural Gas
Rated power (kW) (Rated heat output) (inlet pressure = 148 mbar) ΣQ_n (Hs)	11.92	11.19	11.31
Gas consumption (kg/h) (Nominal mass flow rate) (Inlet pressure = 148 mbar)	Kg/h 0.870	Kg/h 0.805	m3/h 1.08

20ZRFS with piezoelectric kit

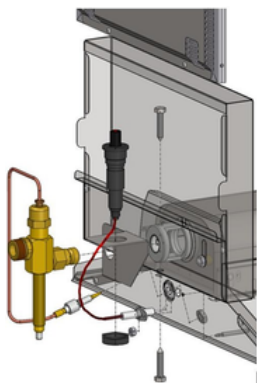

20ZRFS with automatic kit

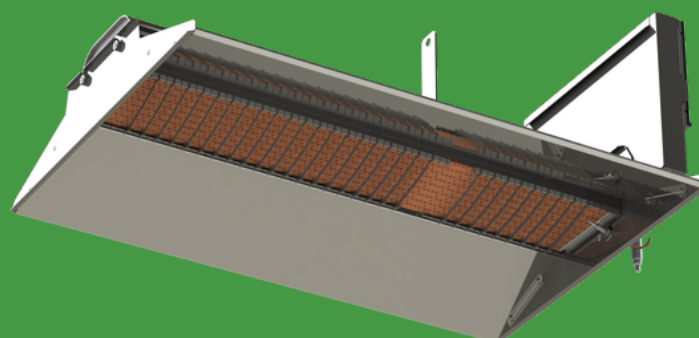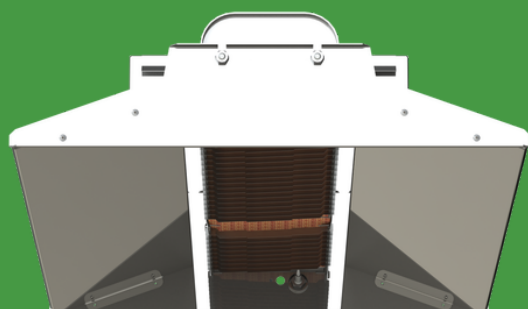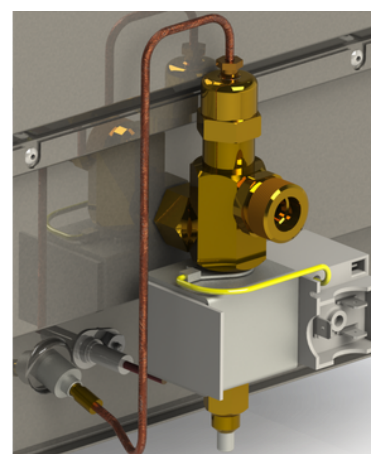

Request a Quote

Manual-ignition igniters :	Quantity
-20ZRFS Butane Heater	
-20ZRFS Propane Heater	
-20ZRFS Natural Gas Breeder	
Options :	
-Piezoelectric kit	
-Automatic kit	
-Adjustable cylinder regulator 50-150 mbar 2 kg/h	

Igor GANIA - Responsable EXPORT
E-Mail : igania@sbm.fr
Tel : 06 71 86 72 03
3 Cottages de la Norge
21490 CLENAY - FRANCE