


2-zone, double-speed regulation module with clock and weekly programming for SX, XFR, XLA-T et XD radiant heaters with thermocouple safety.

BOX CONTENTS



Mechanical characteristics	Material ABS V0 Weight 300g
Electrical characteristics	Power supply 100 à 240V / 50 à 60Hz Idle Power 1,2W Max power 4A
Program	2 heating zones: 3 setpoints per zone (CT, RT and NT) Weekly (7 steps numbered from 0 to 6) per day Exception (20 dates and 20 periods)
Inputs	4 inputs for Safety contacts and Forced marches E1, E2, E3 et E4 . 2 Probe inputs C1 and C2 (1 single probe type A1, supplied with the module) 2 0-10V inputs E5 and E6 .
Network connections	4 DALI double connection terminals without polarity 2 LonWorks® terminals A and B .
Outputs	3 relay outputs S1, S2 and S3 : 230V - 4A 1 NO C dry contact maximum power 1kW resistive with I_{max} 5A (16A max in starting) 4 triac outputs Y1, Y2, Y3 and Y4 : 230V - 1A 2 0-10V outputs: 2mA max Y7 and Y8 . 1 output 5V 200mA Maximum
Connections	Removable screw terminal blocks except for DALI connection and NO C dry contact.
Set-up	On 35 mm DIN rail, in an IP55 enclosure (SBM supply possible)
Environment	Operating temperature 5°C to +45°C Storage temperature -20°C to +70°C Relative humidity + 20% to + 90% without condensation
Module-prob link	Use the cables: RX CABLE DE SONDÉ supplied by SBM

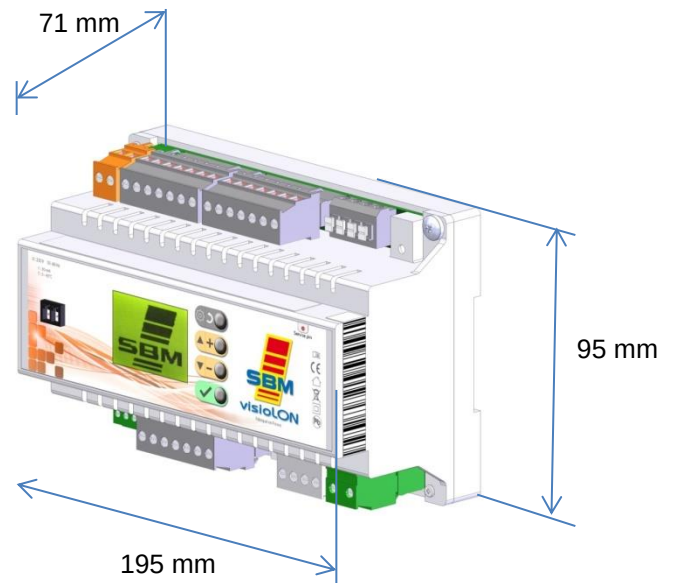