

- Design heater
- > All-aluminium heater
- Colour options : black / bronze / champagne / aluminium
  - Power modulation option
  - > Instant feeling of comfort




















## **OPERATION**

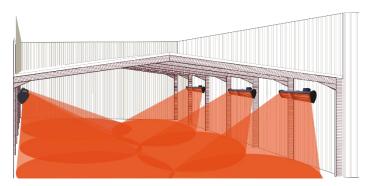


Infrared radiation is one of three modes of heat transport with convection and conduction. It is the only one that can heat spaces effectively like the sun.

It brings **comfort** directly to the level of the users, generating a feeling of **immediate well-being**.

Efficient even for **open terraces** or **churches** that are difficult to heat.

#### **DIMENSIONS**

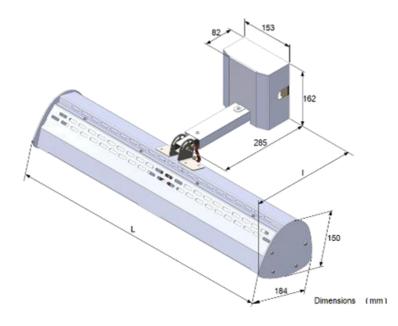

# **ACCESSORIES**

• Customizable cover available

## **QUICK & EASY INSTALLATION**

- Supplied with hanging bracket and connection hox
- Quick wiring with automatic terminal blocks
- Wall or ceiling mounting

## **COLOR OPTIONS**

- → Black
- $\rightarrow$  Bronze
- → Champagne
- → Aluminium



## **POWER DIMMING OPTION**

- Power dimmer (between o% to 100%)
- Remote control for dimmer

## **TECHNICAL DATA**

MODEL	Cal-E 2000	Cal-E 4000
Nominal power (W)	2 000	4 000
Initial power modulation	0% or 100 %	0%, 50% or 100%
Power supply	230VAC (+10% - 15%) – 50 Hz	
Nominal intensity (A)	8.7	17.4
Protection sign	IP X4	
Weight (kg)	3.5	4.7
Length L (mm)	386	766
Recommended installation height (h*)	2.3 m	<b>2.7</b> m
Surface heated with h* and i = 15° (outdoor)	11 m²	14 m²